



RZW Series

Features

- 105°C, 4,000 ~ 10,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHs Compliance




Sleeve & Marking Color: Black & Golden

Specifications

Items	Performance																																																							
Category Temperature Range	-55°C ~ +105°C																																																							
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																							
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C= rated capacitance in μF V = rated DC working voltage in V																																																							
Dissipation Factor (Tanδ at 120 Hz, 20°C)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Tanδ (max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td></tr></table> When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.								Rated Voltage	6.3	10	16	25	35	50	63	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																																
Rated Voltage	6.3	10	16	25	35	50	63																																																	
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																																																	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Impedance Ratio</td><td>Z(-55°C/-40°C)/Z(+20°C)</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>								Rated Voltage		6.3	10	16	25	35	50	63	Impedance Ratio	Z(-55°C/-40°C)/Z(+20°C)	3	3	3	3	3	3	3																														
Rated Voltage		6.3	10	16	25	35	50	63																																																
Impedance Ratio	Z(-55°C/-40°C)/Z(+20°C)	3	3	3	3	3	3	3																																																
Endurance	<table><tr><td rowspan="2">Time</td><td>6.3 ~ 10V</td><td colspan="7">4,000 Hrs for φ D = 5 ~ 6.3 mm; 6,000 Hrs for φ D = 8 ~ 10 mm; 8,000 Hrs for φ D ≥ 12.5 mm</td></tr><tr><td>16 ~ 63V</td><td colspan="7">5,000 Hrs for φ D = 5 ~ 6.3 mm; 7,000 Hrs for φ D = 8 ~ 10 mm; 10,000 Hrs for φ D ≥ 12.5 mm</td></tr><tr><td colspan="2">Capacitance Change</td><td colspan="7">Within ±25% of initial value</td></tr><tr><td colspan="2">Dissipation Factor</td><td colspan="7">Less than 200% of specified value</td></tr><tr><td colspan="2">Leakage Current</td><td colspan="7">Within specified value</td></tr></table> * The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 10,000 hours at 105°C.								Time	6.3 ~ 10V	4,000 Hrs for φ D = 5 ~ 6.3 mm; 6,000 Hrs for φ D = 8 ~ 10 mm; 8,000 Hrs for φ D ≥ 12.5 mm							16 ~ 63V	5,000 Hrs for φ D = 5 ~ 6.3 mm; 7,000 Hrs for φ D = 8 ~ 10 mm; 10,000 Hrs for φ D ≥ 12.5 mm							Capacitance Change		Within ±25% of initial value							Dissipation Factor		Less than 200% of specified value							Leakage Current		Within specified value										
Time	6.3 ~ 10V	4,000 Hrs for φ D = 5 ~ 6.3 mm; 6,000 Hrs for φ D = 8 ~ 10 mm; 8,000 Hrs for φ D ≥ 12.5 mm																																																						
	16 ~ 63V	5,000 Hrs for φ D = 5 ~ 6.3 mm; 7,000 Hrs for φ D = 8 ~ 10 mm; 10,000 Hrs for φ D ≥ 12.5 mm																																																						
Capacitance Change		Within ±25% of initial value																																																						
Dissipation Factor		Less than 200% of specified value																																																						
Leakage Current		Within specified value																																																						
Shelf Life Test	<table><tr><td>Test Time</td><td colspan="7">1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="7">Within ±25% of initial value</td></tr><tr><td>Dissipation Factor</td><td colspan="7">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="7">Within specified value</td></tr></table> * The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.								Test Time	1,000 Hrs							Capacitance Change	Within ±25% of initial value							Dissipation Factor	Less than 200% of specified value							Leakage Current	Within specified value																						
Test Time	1,000 Hrs																																																							
Capacitance Change	Within ±25% of initial value																																																							
Dissipation Factor	Less than 200% of specified value																																																							
Leakage Current	Within specified value																																																							
Ripple Current & Frequency Multipliers	<table><tr><td> Freq.(Hz) Cap.(μF) </td><td>120</td><td>1k</td><td>10k</td><td colspan="4">100k up</td></tr><tr><td>under ~ 33</td><td>0.42</td><td>0.70</td><td>0.90</td><td colspan="4">1.0</td></tr><tr><td>39 ~ 270</td><td>0.50</td><td>0.73</td><td>0.92</td><td colspan="4">1.0</td></tr><tr><td>330 ~ 680</td><td>0.55</td><td>0.77</td><td>0.94</td><td colspan="4">1.0</td></tr><tr><td>820 ~ 1,800</td><td>0.6</td><td>0.80</td><td>0.96</td><td colspan="4">1.0</td></tr><tr><td>2,200 ~ 18,000</td><td>0.7</td><td>0.85</td><td>0.98</td><td colspan="4">1.0</td></tr></table>								Freq.(Hz) Cap.(μF)	120	1k	10k	100k up				under ~ 33	0.42	0.70	0.90	1.0				39 ~ 270	0.50	0.73	0.92	1.0				330 ~ 680	0.55	0.77	0.94	1.0				820 ~ 1,800	0.6	0.80	0.96	1.0				2,200 ~ 18,000	0.7	0.85	0.98	1.0			
Freq.(Hz) Cap.(μF)	120	1k	10k	100k up																																																				
under ~ 33	0.42	0.70	0.90	1.0																																																				
39 ~ 270	0.50	0.73	0.92	1.0																																																				
330 ~ 680	0.55	0.77	0.94	1.0																																																				
820 ~ 1,800	0.6	0.80	0.96	1.0																																																				
2,200 ~ 18,000	0.7	0.85	0.98	1.0																																																				


Diagram of Dimensions

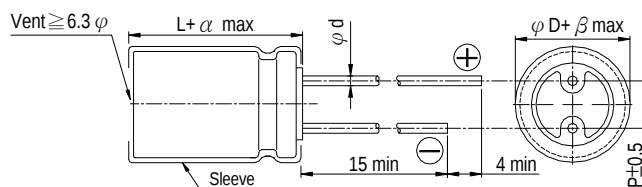

Lead Spacing and Diameter Unit: mm

ϕD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5		0.6			0.8	
α	1.0			L<20: 1.5, L $\geq$ 20: 2.0			
β	0.5						

The case size of 12.5×16, 16×16, 16×20, 18×16, 18×20 and 18×25 are suitable for below diagram:

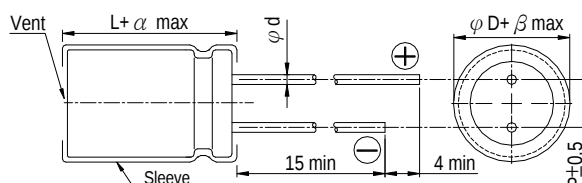



Dimension: $\phi D \times L(mm)$

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension & Permissible Ripple Current

V. DC Contents μF	6.3V (0J)				10V (1A)				16V (1C)				25V (1E)			
	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz
		20°C	-10°C			20°C	-10°C			20°C	-10°C			20°C	-10°C	
47													5×11	0.58	1.16	210
56									5×11	0.58	1.16	210				
100					5×11	0.58	1.16	210					6.3×11	0.22	0.44	340
120									6.3×11	0.22	0.44	340				
150	5×11	0.58	1.16	210												
220					6.3×11	0.22	0.44	340					8×11.5	0.11	0.22	640
330	6.3×11	0.22	0.44	340					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865
470					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210
680	8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450
820	10×12.5	0.080	0.16	865									10×25	0.042	0.084	1,650
1,000	8×15	0.087	0.174	840	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940
1,200	8×20 10×16	0.069 0.060	0.128 0.120	1,050 1,210	10×20	0.046	0.092	1,400	10×25	0.042	0.084	1,650	18×16	0.043	0.086	2,210
1500	10×20	0.046	0.092	1,400	10×25 12.5×16	0.042 0.049	0.084 0.090	1,650 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25	0.027	0.054	2,230
1,800	12.5×16	0.045	0.090	1,450									12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530
2,200	10×25	0.042	0.084	1,650	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×35 18×20	0.020 0.026	0.040 0.052	2,880 2,860
2,700	10×30 16×16	0.031 0.042	0.062 0.084	1,910 1,940	18×16	0.043	0.086	2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25	0.017 0.021	0.034 0.042	3,350 2,930
3,300	12.5×20	0.035	0.070	1,900	12.5×25	0.027	0.054	2,230	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140
3,900	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170
4,700	12.5×30	0.024	0.048	2,650	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220
5,600	12.5×35 16×20	0.020 0.027	0.040 0.054	2,880 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.03	3,610 4,170	18×40	0.012	0.024	4,280
6,800	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40	0.013	0.026	4,080				
8,200	16×31.5	0.017	0.034	3,450	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170	18×35.5	0.014	0.02	4,220				
10,000	16×35.5 18×25	0.015 0.019	0.030 0.038	3,610 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220	18×40	0.012	0.024	4,280				
12,000	16×40 18×31.5	0.013 0.015	0.026 0.030	4,080 4,170	18×40	0.012	0.024	4,280								
15,000	18×35.5	0.014	0.028	4,220												
18,000	18×40	0.012	0.024	4,280												

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension & Permissible Ripple Current

V. DC Contents μF	35V (1V)				50V (1H)				63V (1J)			
	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
2.2					5×11	3.3	6.6	43				
3.3					5×11	2.9	5.8	53				
4.7					5×11	2.5	5.0	95				
10					5×11	2.0	4.0	130				
15									5×11	1.2	2.4	165
22					5×11	0.91	1.82	180				
33	5×11	0.58	1.16	210					6.3×11	0.49	0.98	265
56	6.3×11	0.22	0.44	340	6.3×11	0.39	0.78	295	8×11.5	0.31	0.62	500
82									8×15	0.22	0.44	665
100									10×12.5	0.15	0.30	690
120					8×11.5	0.22	0.44	555				
150					8×15	0.150	0.30	730	8×20	0.17	0.34	820
180					10×12.5	0.160	0.32	760	10×16	0.11	0.22	950
220	8×15	0.083	0.166	840	8×20	0.118	0.236	910	10×20	0.078	0.156	1,150
270	10×12.5	0.080	0.160	865	10×16	0.110	0.22	1,050	12.5×16	0.101	0.202	1,150
330	8×20	0.064	0.128	1,050	10×25	0.072	0.144	1,440	10×25	0.064	0.128	1,350
390	10×16	0.060	0.120	1,210	10×20	0.078	0.156	1,220	12.5×20	0.057	0.114	1,500
470	12.5×16	0.049	0.098	1,450	12.5×16	0.072	0.144	1,440	12.5×20	0.057	0.114	1,500
560	10×25	0.042	0.084	1,650	12.5×25	0.044	0.088	1,950	12.5×25	0.043	0.086	1,900
680	12.5×20	0.035	0.070	1,900	16×16	0.072	0.144	1,690	12.5×30	0.039	0.078	2,300
820	16×16	0.042	0.084	1,940	12.5×30	0.039	0.078	2,310	16×20	0.045	0.090	2,000
1,000	12.5×25	0.027	0.054	2,230	16×20	0.044	0.088	2,210	12.5×35	0.034	0.068	2,500
1,200	16×20	0.027	0.054	2,530	12.5×35	0.033	0.066	2,510	16×25	0.035	0.070	2,600
1,500	12.5×35	0.020	0.040	2,880	16×25	0.033	0.066	2,555	18×20	0.042	0.084	2,500
1,800	16×25	0.021	0.042	2,930	18×20	0.047	0.094	2,490	16×31.5	0.029	0.058	2,850
2,200	18×20	0.026	0.052	2,860	16×31.5	0.027	0.054	3,010	18×25	0.034	0.068	2,800
2,700	16×31.5	0.017	0.034	3,450	18×25	0.028	0.056	2,740	16×40	0.025	0.050	3,400
3,300	18×25	0.019	0.038	3,140	18×31.5	0.024	0.048	3,150	18×31.5	0.028	0.056	3,300
3,900	18×31.5	0.015	0.030	4,170	18×35.5	0.022	0.044	3,680	18×35.5	0.025	0.050	3,400
	16×40	0.013	0.026	4,080								
	18×35.5	0.014	0.028	4,220								
	18×40	0.012	0.024	4,280								